




仕様

材質：ポリアミド (PA6)
 シール：ネオプレーン
 保護構造：IP68
 色：グレー (PAL 7001)
 ：ブラック (PAL 9005)
 ：ライトグレー (PAL 7035)
 使用温度範囲：-20℃～100℃

寸法図

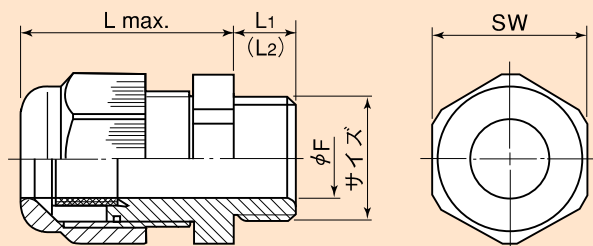

型式・寸法表

単位:mm

サイズ	ノーマルタイプ			ロングタイプ			SW	適合ケーブル径 φF	縮小型パッキン 使用時	パネルカット 寸法
	型式	Lmax.	L1	型式	Lmax.	L2				
PG 7	BF 7	22.5	8	BFL 7	22.5	15	15	3~6.5	2~5	13.0
PG 9	BF 9	26.0	8	BFL 9	26.0	15	19	4~8	2~6	15.7
PG11	BF11	29.0	8	BFL11	29.0	15	22	5~10	3~7	19.0
PG13.5	BF13	30.0	9	BFL13	30.0	15	24	6~12	5~9	21.0
PG16	BF16	32.5	10	BFL16	32.5	15	27	10~14	7~12	23.0
PG21	BF21	36.5	11	BFL21	36.5	15	33	13~18	9~16	28.8
PG29	BF29	42.0	11	BFL29	42.0	15	42	18~25	12~20	37.5
PG36	BF36	48.0	13	BFL36	48.0	18	53	22~32	20~26	47.5
PG42	BF42	52.0	13	BFL42	52.0	18	60	30~38	25~31	54.5
PG48	BF48	53.0	14	BFL48	53.0	18	65	34~44	29~35	59.8
M12×1.5	BF-M12	23.0	8	BFL-M12	23.0	15	15	3~6	2~5	12.5
M16×1.5	BF-M16	27.5	8	BFL-M16	27.5	15	20	5~10	3~10	16.5
M20×1.5	BF-M20	29.0	8	BFL-M20	28.0	15	24	8~13	5~13	20.5
M25×1.5	BF-M25	35.0	8	BFL-M25	35.0	15	29	11~17	8~17	25.5
M32×1.5	BF-M32	40.0	10	BFL-M32	40.0	15	36	15~21	12~21	32.5
M40×1.5	BF-M40	41.0	10	BFL-M40	41.0	18	46	19~28	16~28	40.5
M50×1.5	BF-M50	49.5	12	BFL-M50	49.5	18	55	27~35	21~35	50.5
M63×1.5	BF-M63	53.5	12	BFL-M63	53.5	18	68	32~42	27~48	64.5